

PERFILES estructurales

Calidades S235JR2 y S355J2. Posibilidad de corte a medida.

HEB (IPB)		HEM (IPBV)		HEA (IPBL)		Perfil C		Perfil I		Perfil Europeo	
Perfil HEB	Peso Almacén Kg/m	Perfil HEB	Peso Almacén Kg/m	Perfil HEA	Peso Almacén Kg/m	Perfil C	Peso Almacén Kg/m	Perfil I	Peso Almacén Kg/m	Perfil IPE	Peso Almacén Kg/m
100	20,9	100	42,8	100	17,1	80	8,9	80	6,1	80	6,2
120	27,4	120	53,4	120	20,4	100	10,9	100	8,5	100	8,3
140	34,5	140	64,8	140	25,3	120	13,7	120	11,5	120	10,7
160	43,7	160	78,1	160	31,2	140	16,4	140	14,7	140	13,2
180	52,5	180	91,1	180	36,4	160	19,3	160	18,5	160	16,2
200	63,0	200	106,0	200	43,0	180	22,6	180	22,5	180	19,3
220	73,0	220	120,0	220	52,0	200	26,0	200	27,0	200	23,0
240	85,0	240	161,0	240	62,0	220	30,0	220	32,0	220	26,9
260	95,0	260	176,0	260	70,0	240	34,0	240	37,0	240	31,5
280	106,0	280	194,0	280	78,0	260	39,0	260	43,0	270	37,0
300	120,0	300	244,0	300	90,0	280	43,0	280	49,0	300	43,3
320	130,0	320	251,0	320	100,0	300	48,0	300	56,0	330	50,4
340	137,0	340	254,0	340	108,0	320	61,0	320	63,0	360	58,0
360	146,0	360	256,0	360	115,0	350	62,0	340	70,0	400	68,0
400	159,0	400	262,0	400	128,0	380	65,0	360	78,0	450	80,0
450	175,0	450	270,0	450	143,0	400	74,0	400	95,0	500	93,0
500	192,0	500	277,0	500	159,0			450	118,0	550	109,0
550	204,0	550	285,0	550	170,0			500	145,0	600	125,0
600	217,0	600	292,0	600	182,0						
650	231,0	650	300,0	650	195,0						
700	247,0	700	309,0	700	209,0						
800	269,0	800	325,0	800	230,0						
900	298,0	900	341,0	900	258,0						
1000	322,0	1000	358,0	1000	279,0						






IBERACERO

PERFILES UPE de alas paralelas

Dimensiones según DIN 1026-2

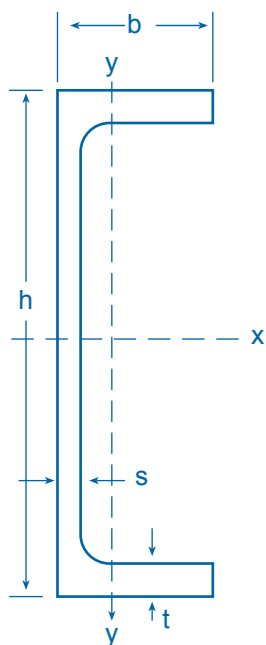

UPE	Dimensiones mm				Area cm ²	Peso Kg/m	Momento de Inercia cm ⁴		Módulo resistente cm ³		Radio de giro mm	
	h	b	s	t			I _x	I _y	W _x	W _y	i _x	i _y
UPE 80	80	50	4,0	7,0	10,1	7,90	107	25,4	26,8	7,98	3,26	1,59
UPE 100	100	55	4,5	7,5	12,5	9,82	207	38,2	41,4	10,6	4,07	1,75
UPE 120	120	60	5,0	8,0	15,4	12,1	364	55,4	60,6	13,8	4,86	1,90
UPE 140	140	65	5,0	9,0	18,4	14,5	599	78,7	85,6	18,2	5,71	2,07
UPE 160	160	70	5,5	9,5	21,7	17,0	911	107	114	22,6	6,48	2,22
UPE 180	180	75	5,5	10,5	25,1	19,7	1.353	144	150	28,6	7,34	2,39
UPE 200	200	80	6,0	11,0	29,0	22,8	1.909	187	191	34,4	8,11	2,54
UPE 220	220	85	6,5	12,0	33,9	26,6	2.682	246	244	42,5	8,90	2,70
UPE 240	240	90	7,0	12,5	38,5	30,2	3.599	311	300	50,1	9,67	2,84
UPE 270	270	95	7,5	13,5	44,8	35,2	5.255	401	389	60,7	10,8	2,99
UPE 300	300	100	9,5	15,0	56,6	44,4	7.823	538	522	75,6	11,8	3,08
UPE 330	330	105	11,0	16,0	67,8	53,2	11.008	681	667	89,7	12,7	3,17
UPE 360	360	110	12,0	17,0	77,9	61,2	14.825	844	824	105	13,8	3,29
UPE 400	400	115	13,5	18,0	91,9	72,2	20.981	1.045	1.049	123	15,1	3,37